

Conventional Series II

TRUCK MIXER


MOUNTING OPTIONS

Mixing Capacity*	10 cu yds/ 7.6 cu m	10.5 cu yds/ 8 cu m	11 cu yds/ 8.4 cu m	12 cu yds/ 9.2 cu m
Agitator Volume**	13.3 cu yds/ 10.1 cu m	14 cu yds/ 10.7 cu m	14.8 cu yds/ 11.3 cu m	16 cu yds/ 12.4 cu m
Gross Drum Volume	450 cu ft/ 12.7 cu m	471 cu ft/ 13.3 cu m	496 cu ft/ 14 cu m	544 cu ft/ 15.4 cu m
A - Back of Cab to End of Charge Hopper	224 in/ 569 cm	230 in/ 584 cm	236 in/ 599 cm	250 in/ 635 cm
B - Min. Length of Platform	200 in/ 508 cm	206 in/ 523 cm	212 in/ 538 cm	226 in/ 574 cm
C - Charge Hopper Height	101.5 in/ 258 cm	101.5 in/ 258 cm	101.5 in/ 258 cm	101.5 in/ 258 cm
D - Height of Mixer Unit	105 in/ 266 cm	105 in/ 266 cm	105 in/ 266 cm	105 in/ 266 cm

* Agitator volume will vary with conditions.

** Drum complies with standards set by Truck Mixer Manufacturers Bureau.

Specifications are subject to change without prior notice

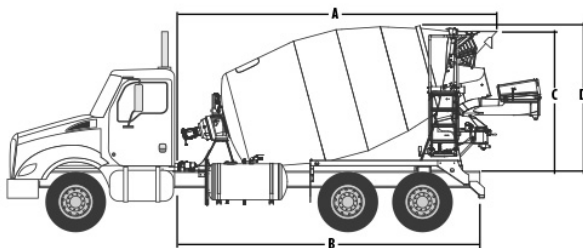

FEATURES

DRUM

- Capacities: 10, 10.5, 11 & 12 cubic yard.
- Discharge Opening: 46"
- Wide Charging Hopper: 44.5" x 28.5"
- Hatch: Bolted
- Head: 1/4" high chromium steel
- Shell: 3/16" high chromium steel
- Fins: 1/4" thick abrasion resistant steel
- Track: Forged steel
- Rollers: 8" diameter hardened alloy steel
- Transmission: Two-stage ZF 7000 series
- Low CG

SWING CHUTE

- 5'6" with 3'2" foldover
- Two 4' extensions
- 7 positions with manual lock
- Pneumatic variable position chute lock

WATER TANK

- 125-gallon stainless steel
- Polymeric water tank with diaphragm pump

HYDRAULIC SYSTEM

- Pump, Variable displacement
- Motor, Fixed displacement
- 12-gallon steel tank with sight gauge
- Charge pump filtration
- Oil Cooler with electric fan

CABLE CONTROLS

- In cab and at rear

FENDERS

- 115" aluminum tandem with steel fabricated reinforced ends
- Rubber mud flaps

LIGHTING

- LED with three bar rear marker

PAINT

- Polyurethane two part top coat and two part primer

OPTIONS

- SMART Drum constant speed control
- Light weight 10.5, 11 and 12 cu.yd. steel drum
- HD Drum (1/4" head, 1/4" skin, 1/4" fins)
- Electric Controls
- Wireless remote controls
- 65, 75, 90, 115, 150-gallon water tanks
- Spring-loaded ball-valve water control
- Semi-auto slump meter
- Aluminum chutes
- Aluminum front mud flaps
- Tilt hopper
- Chute vibrator
- Drum roller guards
- Fender-mounted spot lights
- Rear view camera
- More options available - ask your sales rep.



SCHWING®